

LMT-GE-T

RJ-45 SFP Transceiver



1. PRODUCT FEATURES :

- Up to 1.25 Gb/s bi-directional data links
- Hot-pluggable SFP footprint
- Compact RJ-45 connector assembly
- Fully metal enclosure, for lower EMI
- RoHS compliant and lead-free
- Single +3.3V power supply
- 10/100/1000 BASE-T operation in host systems with 1000BASE-X interface
- 1.25 Gigabit Ethernet over Cat 5 cable
- Ambient Operating temperature: -40°C to +85°C

2. PRODUCT DESCRIPTION :

SFP-TI-AUTO-SERDES Copper Small Form Pluggable (SFP) transceivers are based on the SFP Multi Source Agreement (MSA) . They are compatible with the Gigabit Ethernet and 10/100/1000BASE-T standards as specified in IEEE Std 802.3 .

The SFP-TI-AUTO-SERDES uses the SFP's RX_LOS pin for link indication. If pull up SFP's TX_DISABLE pin, IC be reset.

3. PRODUCT SELECTION

| Product part Number | Link Indicator on RX_LOS Pin | Support 10/100/1000bas e-T | Support SERDES |
|---------------------|------------------------------|----------------------------|----------------|
| SFP-TI-AUTO-SERDES | Yes | Yes | Yes |

4. SFP to Host Connector Pin Out

| Pins | Symbol | Name / Description | Ref |
|------|-------------|--|-----|
| 1 | VEET | Transmitter Ground (Common with Receiver Ground) | 1 |
| 2 | TFAULT | Transmitter Fault. Not supported. | |
| 3 | TDIS | Transmitter Disable. Laser output disabled on high or open. | 2 |
| 4 | MOD DEF(2) | Module Definition 2. Data line for Serial ID. | 3 |
| 5 | MOD DEF(1) | Module Definition 1. Clock line for Serial ID. | 3 |
| 6 | MOD_DEF(0) | Module Definition 0. Grounded within the module. | 3 |
| 7 | Rate Select | No connection required | |
| 8 | LOS | Loss of Signal indication. Logic 0 indicates normal operation. | |
| 9 | VEER | Receiver Ground (Common with Transmitter Ground) | 1 |
| 10 | VEER | Receiver Ground (Common with Transmitter Ground) | 1 |
| 11 | VEER | Receiver Ground (Common with Transmitter Ground) | 1 |
| 12 | RD- | Receiver Inverted DATA out. AC Coupled | |



| | | | |
|----|------|--|---|
| 13 | RD+ | Receiver Non-inverted DATA out. AC Coupled | |
| 14 | VEER | Receiver Ground (Common with Transmitter Ground) | |
| 15 | VCCR | Receiver Power Supply | |
| 16 | VCCT | Transmitter Power Supply | |
| 17 | VEET | Transmitter Ground (Common with Receiver Ground) | 1 |
| 18 | TD+ | Transmitter Non-Inverted DATA in. AC Coupled. | |
| 19 | TD- | Transmitter Inverted DATA in. AC Coupled. | |
| 20 | VEET | Transmitter Ground (Common with Receiver Ground) | 1 |

Notes:

- 1. Circuit ground is connected to chassis ground*
- 2. PHY disabled on TDIS > 2.0V or open, enabled on TDIS < 0.8V*
- 3. Should be pulled up with 4.7k - 10k Ohms on host board to a voltage between 2.0 V and 3.6 V. MOD_DEF(0) pulls line low to indicate module is plugged in.*

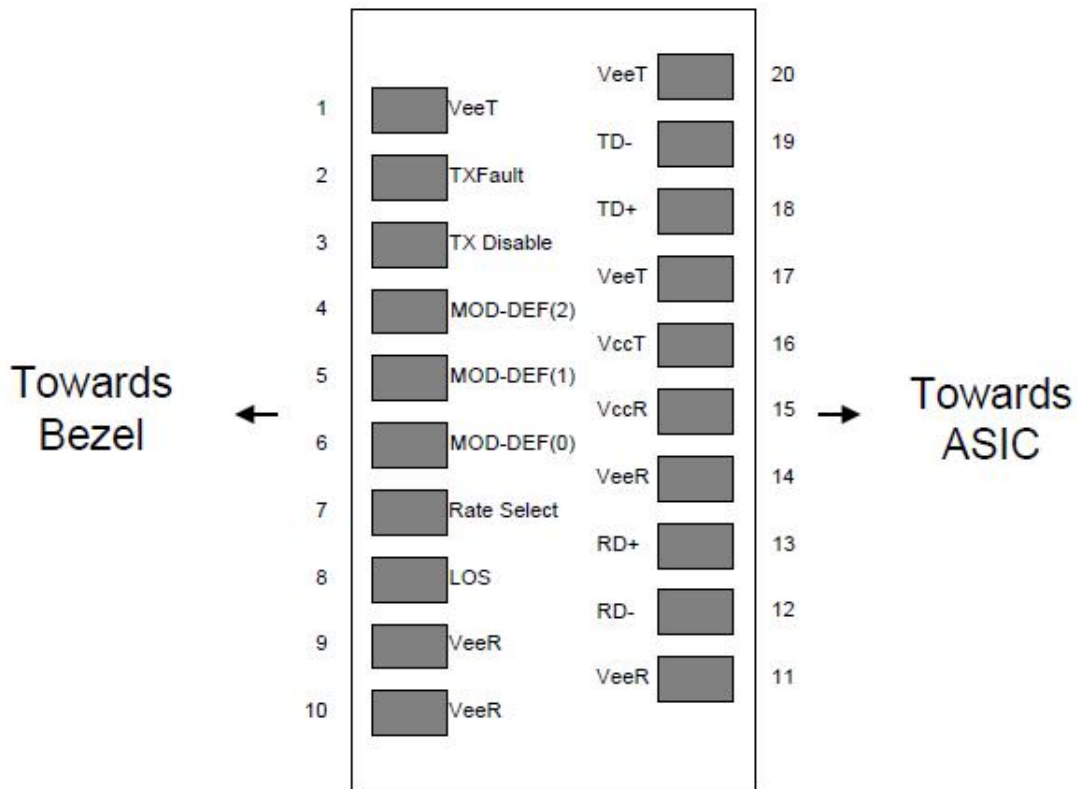


Figure 1. Diagram of host board connector block pin numbers and names

5. +3.3V Volt Electrical Power Interface

The SFP-TI-AUTO has an input voltage range of 3.3 V +/- 5%. The 4V maximum voltage is not allowed for continuous operation.

| +3.3 Volt Electrical Power Interface | | | | | | |
|--------------------------------------|--------|------|-----|------|------|-------------------|
| Parameter | Symbol | Min | Typ | Max | Unit | Notes/Conditions |
| Supply Current | Is | | 170 | 300 | mA | |
| Input Voltage | Vcc | 3.13 | 3.3 | 3.47 | V | Referenced to GND |
| Maximum Voltage | Vmax | | | 4 | V | |



6. Low-Speed Signals

MOD_DEF(1) (SCL) and MOD_DEF(2) (SDA), are open drain CMOS signals (see section VII, "Serial Communication Protocol"). Both MOD_DEF(1) and MOD_DEF(2) must be pulled up to host_Vcc

Low-Speed Signals, Electronic Characteristics

| Parameter | Symbol | Min | Max | Unit | Notes/Conditions |
|-----------------|--------|----------------|----------------|------|---|
| SFP Output LOW | VOL | 0 | 0.5 | V | 4.7k to 10k pull-up to host_Vcc, measured at host side of connector |
| SFP Output HIGH | VOH | host_Vcc - 0.5 | host_Vcc + 0.3 | V | 4.7k to 10k pull-up to host_Vcc, measured at host side of connector |
| SFP Input LOW | VIL | 0 | 0.8 | V | 4.7k to 10k pull-up to Vcc, measured at SFP side of connector |
| SFP Input HIGH | VIH | 2 | Vcc + 0.3 | V | 4.7k to 10k pull-up to Vcc, measured at SFP side of connector |

7. High-Speed Electrical Interface

All high-speed signals are AC-coupled internally.

High-Speed Electrical Interface, Transmission Line-SFP

| Parameter | Symbol | Min | Typ | Max | Unit | Notes/Conditions |
|----------------|--------|-----|-----|-----|------|----------------------------------|
| Line Frequency | fL | | 125 | | MHz | 5-level encoding, per IEEE 802.3 |



| | | | | | | |
|---------------------|----------|--|-----|--|-----|---|
| Tx Output Impedance | Zout, TX | | 100 | | Ohm | Differential, for all frequencies between 1MHz and 125MHz |
| Rx Input Impedance | Zin, TX | | 100 | | Ohm | Differential, for all frequencies between 1MHz and 125MHz |

High-Speed Electrical Interface, Transmission Line-SFP

| Parameter | Symbol | Min | Typ | Max | Unit | Notes/Conditions |
|--------------------------------|----------|-----|-----|-----|------|------------------|
| Single ended data input swing | Zin, TX | | 100 | | Ohm | Single ended |
| Single ended data output swing | Voutsing | 350 | | 800 | mV | Single ended |
| Rise/Fall Time | Tr,Tf | | 175 | | psec | 20%-80% |
| Tx Input Impedance | Zin | | 50 | | Ohm | Single ended |
| Rx Output Impedance | Zout | | 50 | | Ohm | Single ended |

8. General Specifications

| General | | | | | | |
|--------------|--------|-----|-----|------|--------|--|
| Parameter | Symbol | Min | Typ | Max | Unit | Notes/Conditions |
| Data Rate | BR | 10 | | 1000 | Mb/sec | IEEE 802.3 compatible. See Notes 2 through 4 below |
| Cable Length | L | | | 100 | m | Category 5 UTP. BER |

Notes:

1. Clock tolerance is +/- 50 ppm
2. By default, the SFP-TI-AUTO-SERDES is a full duplex device in preferred master mode
3. Automatic crossover detection is enabled. External crossover cable is not required

9. Environmental Specifications

| Environmental Specifications | | | | | | |
|------------------------------|--------|-----|-----|-----|------|--|
| Parameter | Symbol | Min | Typ | Max | Unit | Notes/Conditions |
| Operating Temperature | Top | -40 | | 85 | °C | IEEE 802.3 compatible. See Notes 2 through 4 below |
| Storage Temperature | Tsto | -40 | | 85 | °C | Ambient temperature |

10. Serial Communication Protocol

All WINTOP SFPs support the 2-wire serial communication protocol outlined in the SFP MSA. These SFPs use an MCU, can be accessed with address of A0h.

Serial Bus Timing, Requirements

| Parameter | Symbol | Min | Typ | Max | Unit | Notes/Conditions |
|-----------------------------|--------|-----|-----|---------|------|------------------|
| I ² C Clock Rate | | 0 | | 200,000 | Hz | |

11. Outline Dimensions (mm)

