




LM-822UGP

DATASHEET

Unmanaged Gigabit PoE Switch 8GE+2GE

The 8-Port PoE Ethernet Switch is designed for high-definition security surveillance, featuring 8 PoE downlink ports and 2 uplink RJ45 and SFP Giga ports with a total power budget of 120W.

It supports fast and stable data transmission with robust lightning and ESD protection, ensuring reliable performance in demanding environments.

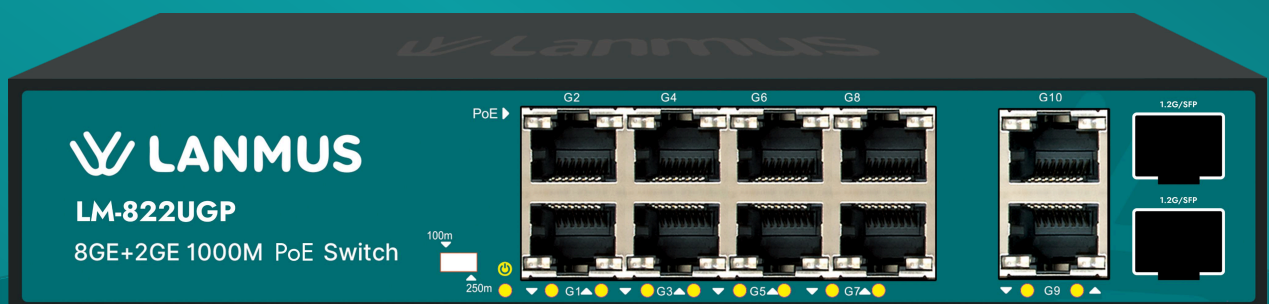

PRODUCT INTRODUCTION

Product Overview

The 8-Port PoE Ethernet Switch is a high-performance solution designed for modern security surveillance and high-definition video transmission systems.

It comes equipped with 8 downlink 10/100/1000 Base-T PoE ports and 2 uplink 10/100/1000 Base-T & SFP Fiber Ports ensuring seamless data forwarding and sufficient backplane bandwidth for clear images and smooth video streaming.

Built to industry standards, the switch supports IEEE802.3, IEEE802.3u, IEEE802.3x, and IEEE802.3ab, delivering stable and efficient networking performance even in demanding environments. Each PoE port provides up to 30W output, with a total power budget of 120W, making it ideal for powering IP cameras, wireless access points, and VoIP phones.

Its compact, sturdy design allows easy installation in tight spaces, while the plug-and-play setup requires no complex configuration making deployment fast and effortless.

The 8-Port PoE Ethernet Switch is a reliable, high-stability networking solution built to meet the growing demands of modern surveillance systems and Ethernet-based projects.

Highlight Features

High-Performance Design

- Created for high-definition Ethernet surveillance systems that require fast data forwarding and stable transmission.

Port Configuration

- 8 × 10/100/1000 Base-T PoE downlink ports
- 2 × 10/100/1000 Base-T uplink ports
- 2 × 10/100/1000 SFP uplink ports

LM-822UGP

PoE Power Supply

- Supports IEEE802.3af/at standards
- 30W max per port
- 120W total power budget
- Ideal for IP cameras, wireless APs, VoIP phones

Network Standards Supported

- IEEE802.3
- IEEE802.3u
- IEEE802.3x
- IEEE802.3ab

Easy Installation

- Compact and stable design
- Plug-and-play operation
- No configuration required

SPECIFICATION

MODEL	LM-822UGP
INTERFACE CHARACTERISTICS	
Downstream Ports	8 * 10/100/1000 Base-T (PoE)
Uplink Ports	2 * 10/100/1000 Base-T & SFP Fiber ports
CHIP PARAMETER	
Network Standard	IEEE802.3; IEEE802.3u; IEEE802.3x; IEEE802.3ab

SPECIFICATION

MODEL	LM-822UGP
CHIP PARAMETER	
Switching capacity	28Gbps
Throughput	14.88Mpps
Switch Processing Scheme	Store and Forward
Memory Buffer	1.5M
MAC Table	4K
POWER	
PoE Standard	802.3af/at(PSE)
PsE Type	End-span
Power Pin Assignment	1/2(+), 3/6(-)
PoE Power Output	Single port power 15.4w, maximum port power 30w
PoE Total Power	120w
Power Supply	DC:52V1.25A
Power Dissipation	<5w
PHYSICAL PARAMETER	
Work temperature	20°C~55°C
Storage temperature	20°C~75°C
Humidity	5%-95%
Dimension (L ×W × H)	195mm×130mm×40mm

SPECIFICATION

MODEL	LM-822UGP
PHYSICAL PARAMETER	
Regulator	CE, ROHS
CONTENT	
10-port 10/100/1000M PoE Ethernet switch	1 unit
Power line	1 article
User Guide	1 book
Warranty Card	1 sheet



Unmanaged Switch

DATA SHEET | LM-822UGP



LANMUS.COM